

Field-attachable I/O Connector-M8 (Straight-female)

Description:

Used for sensors and I/O connecting. Standard threaded connection. Designed with the female port. 3,4-core are available. Degree of protection IP67.

Features:

- Screw connection, quickly and flexibly



Type Code					
Cable jacket	Description	Type	Pin	Rated current/voltage	Cable φ
PA	Female 3-core	LSO8.3-0/C(BU)	3	4A/60V	3.5-5mm
	Female 4-core	LSO8.4-0/C(BU)	4	4A/30V	3.5-5mm


Selection Instructions

LSO8.4 - 0/C(BU)

Attn: Standard

Additional Information

1. Cross section of core for welded connection , max.0.75mm²; Cross section of core for screwed connection , Max.0.5mm².
2. To connected into distribution box or IP 67 modular, match the internal mistake-proofing slot.
3. "00" connector : length of peeled jacket 12mm, length of peeled wire 4mm.
4. "A6" connector : length of peeled jacket 12mm, length of peeled wire 3mm.

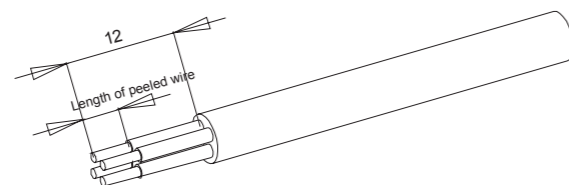

Field-attachable I/O Connector-M8 (Straight-male)

Description:

Used for sensors and I/O connecting. Standard threaded connection. Designed with the male port. 3,4-core are available. Degree of protection IP67.

Features:

- Screw connection, quickly and flexibly



Type Code					
Cable jacket	Description	Type	Pin	Rated current/voltage	Cable φ
PA	Male 3-core	LS8.3-0/C(BU)	3	4A/60V	3.5-5mm
	Male 4-core	LS8.4-0/C(BU)	4	4A/30V	3.5-5mm

Selection Instructions

LS8.4 - 0/C(BU)

Attn: Standard

Additional Information

1. Cross section of core for welded connection , max.0.75mm²; Cross section of core for screwed connection , Max.0.5mm².
2. To connected into distribution box or IP 67 modular, match the internal mistake-proofing slot.
3. "00" connector : length of peeled jacket 12mm, length of peeled wire 4mm.
4. "A6" connector : length of peeled jacket 12mm, length of peeled wire 3mm.

