


ARTICLE PROPERTIES

<b>ARTICLE NUMBER</b>	FW-VA21-024-LV/PG9
<b>SHAPE TYPE 1</b>	Valve plug form A 18mm field-wireable
<b>SHAPE TYPE 2</b>	Single-ended
<b>NUMBER OF PINS</b>	3
<b>INTERFACE TYPE</b>	Form A(18 mm)
<b>LED</b>	Yellow
<b>SUPPRESSION</b>	Z-diode

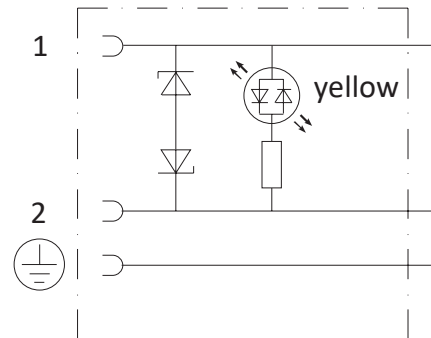

MECHANICAL DATA

<b>FASTENING SCREW</b>	M3x32mm
<b>NUMBER OF POLES</b>	2+PE
<b>PROTECTION DEGREE ADDITIONAL CONDITION</b>	Screwed
<b>THE RANGE OF CABLE DIAMETERS</b>	6-8mm
<b>WIRE RANGE</b>	0.34 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>

ELECTRICAL DATA

<b>OPERATING VOLTAGE</b>	24 V DC
<b>Current operating per contact max.</b>	4,0 A
<b>RATED SURGE VOLTAGE</b>	4 KV
<b>POLLUTION DEGREE</b>	3

ENVIRONMENTAL CONDITIONS

<b>PROTECTION CLASS</b>	IP67 inserted and tightened
<b>AMBIENT TEMPERATURE</b>	-30 ... 90 °C

APPROVALS

